




MF-S-D600-STD-4000K-SG

Features

- Available in four different diameters: 450, 600, 900 and 1200mm.
- Prismatic acrylic lens with soft illumination and low glare
- Built-in driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

Mounting


- Suspended, surface, recessed




PHOTOS



Dimensions



Distributions

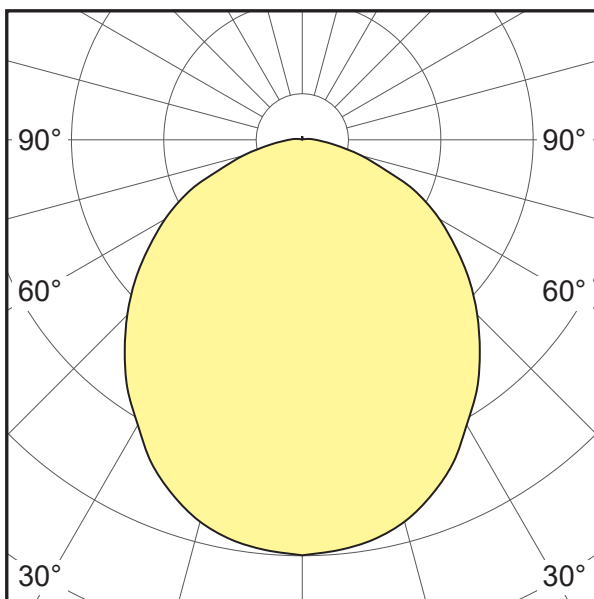


Ordering Info

1. BASIC MODEL

MF-S	Suspended - direct
MF-SM	Surface mount - direct
MF-RT	Recessed - direct

2. DIAMETER

D450mm	450mm outside diameter
D600mm	600mm outside diameter
D900mm	900mm outside diameter
D1200mm	1200mm outside diameter

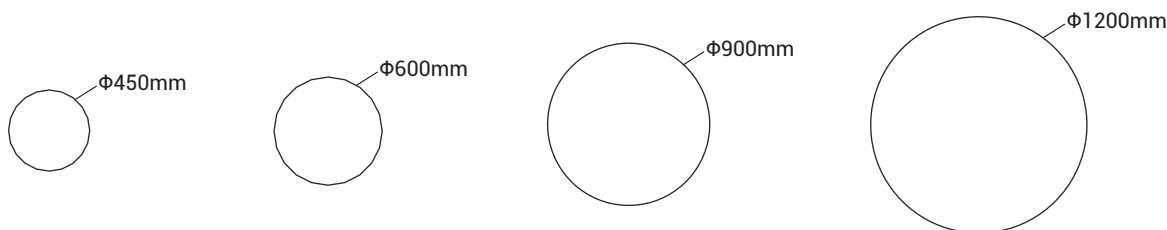

3. LED LAMPING - DIRECT LIGHT

STD - xxxxK	Standard output
-------------	-----------------

Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.

Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, RGB, RGBW, TUNE(2700K-6500K). Contact factory for details.

See page 6 for information of LED lamping output.


4. DRIVER

STD	Non-dimmable
0/1-10V	1-10V / 0-10V dimming
DALI	DALI dimming
DMX	DMX dimming
OTHER	Consult factory for options


5. SUSPENSION MOUNT CANOPY

RC Canopy in round shape - suspended only

SC Canopy in square shape - suspended only

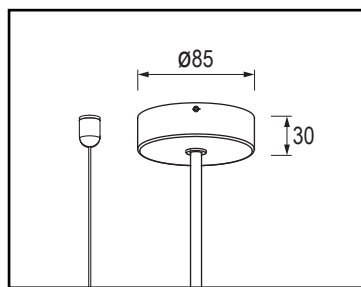

Round canopy

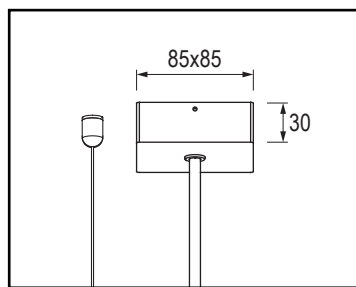

Square canopy

6. FINISH

BK Matt black powercoat


WH Matt white powercoat

SG Silver grey powercoat

CF Custom finish - RAL or Pantone or other finish options




Matt black



Matt white



Silver grey



Custom

7. OPTIONAL ADD-ONS

EM 1.5 hour emergency kit (remote only)

SS PIR sensor

OTHERS Consult factory for options

PERFORMANCE DATA - LED LAMPING

OUTPUT OPTIONS	DELIVERED LUMENS	WATTS	CRI OPTIONS	CCT OPTIONS	LED LAMPING
D450 3000K	2236	28	80 90	2700K 3000K 3500K 4000K 5000K 6500K	Standard output
D450 4000K	2368	28			Standard output
D600 3000K	4562	47			Standard output
D600 4000K	4832	47			Standard output
D900 3000K	8018	101			Standard output
D900 4000K	8493	101			Standard output
D1200 3000K	15917	178			Standard output
D1200 4000K	16861	178			Standard output

Note: Data provided is from photometric test of fixtures output with 90CRI at 4000K using a non-dimmable driver.



More information and data,
please visit:
www.zalite.cn

V1.0_2025-05