


ESAGONO-S-500mm-SHEX & ESAGONO-S-500mm-DHEX

## Features

- Custom hexagon dimension and layout
- Prismatic acrylic lens with soft illumination and low glare
- Built-in driver, dim or non-dim available
- Wide range of finishes
- 100% recyclable, extruded architectural grade T6063 aluminum

## Mounting


- Suspended




PHOTOS



## Dimensions

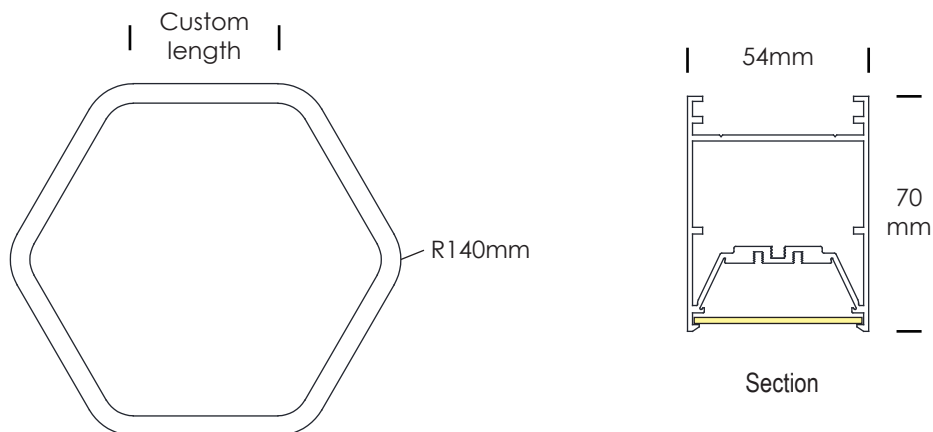

## Distributions

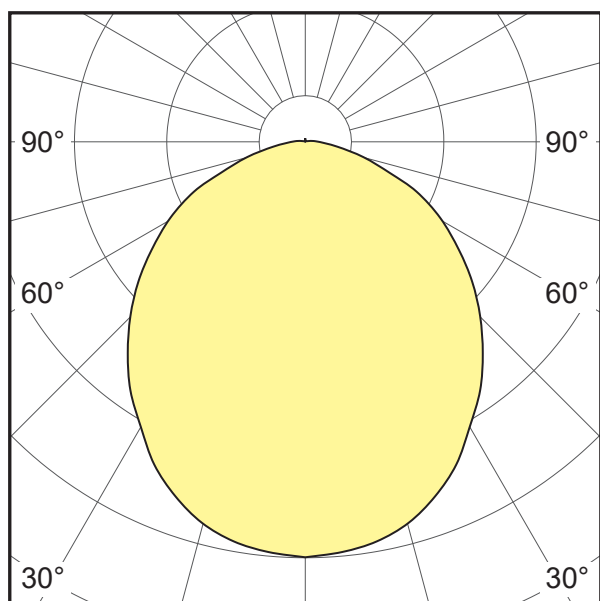



**3. LED LAMPING - DIRECT LIGHT**

|                    |                                              |
|--------------------|----------------------------------------------|
| <b>LOW - xxxxK</b> | Linear LED strip, low output, LED 10W/M      |
| <b>STD - xxxxK</b> | Linear LED strip, standard output, LED 20W/M |
| <b>HI - xxxxK</b>  | Linear LED strip, high output, LED 30W/M     |


*Note: Standard CCT: 3000K, 3500K, 4000K; CRI80 and CRI90 are available.  
 Other option: 2700K, 5000K, 5700K, 6500K, red, green, blue, RGB, RGBW, TUNE(2700K-6500K). Contact factory for details.  
 See page 8 for information of LED lamping output.*

**4. DRIVER**


|                |                             |
|----------------|-----------------------------|
| <b>STD</b>     | Non-dimmable                |
| <b>0/1-10V</b> | 1-10V / 0-10V dimming       |
| <b>DALI</b>    | DALI dimming                |
| <b>DMX</b>     | DMX dimming                 |
| <b>OTHER</b>   | Consult factory for options |

**5. SUSPENSION MOUNT CANOPY**

|           |                                         |
|-----------|-----------------------------------------|
| <b>RC</b> | Canopy in round shape - suspended only  |
| <b>SC</b> | Canopy in square shape - suspended only |

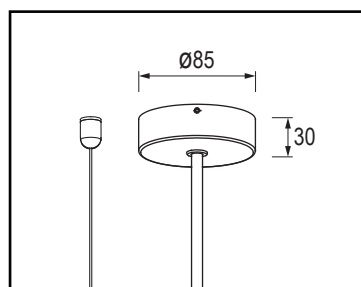

Round canopy

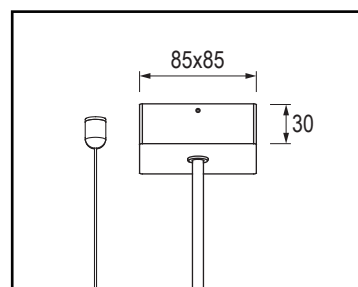


Square canopy

## 6. FINISH

|           |                                                        |
|-----------|--------------------------------------------------------|
| <b>BK</b> | Matt black powercoat                                   |
| <b>WH</b> | Matt white powercoat                                   |
| <b>SG</b> | Silver grey powercoat                                  |
| <b>CF</b> | Custom finish - RAL or Pantone or other finish options |



Matt black



Matt white



Silver grey



Custom


## 7. OPTIONAL ADD-ONS

|               |                                      |
|---------------|--------------------------------------|
| <b>EM</b>     | 1.5 hour emergency kit (remote only) |
| <b>SS</b>     | PIR sensor                           |
| <b>OTHERS</b> | Consult factory for options          |

## SPECIFICATION DETAILS

### DESIGNABLE HEGAGONS

The hexagon, dual hexagons, triple hexagons, multi-hexagons are designable thanks to the special connector. It is ideal for decorative use with excellent, homogeneous illumination.

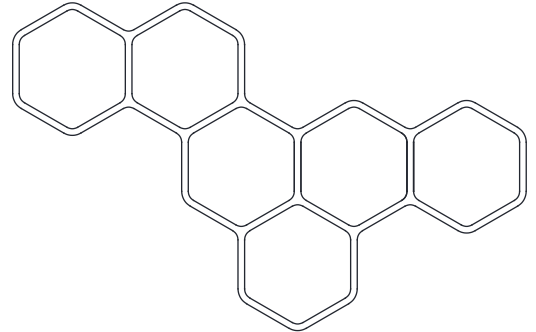

### PRISMATIC LENS

The customized acrylic lens with prismatic surface is opal and extra diffuse with minimal-to-no source visibility. This lens produces smooth, even light across the lens surface and that sits flush with the fixture body.



### SLIDED SUSPENSION KIT

The fixture is designed with slided suspension kit for suspended mounting. The slided suspension kit provides flexible and convenient installation in field. It's available to change the position and quantity of suspension kits when the ceiling layout is changed during installation.



**PERFORMANCE DATA - LED LAMPING**

| OUTPUT OPTIONS | DELIVERED LUMENS | WATTS | CRI OPTIONS | CCT OPTIONS                                        | LED LAMPING  |
|----------------|------------------|-------|-------------|----------------------------------------------------|--------------|
| HEX-LOW        | 4727             | 72.5  | 80<br>90    | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K | 10W/M, 3000K |
| HEX-STD        | 9197             | 144   |             |                                                    | 20W/M, 3000K |
| HEX-HI         | 12778            | 218   |             |                                                    | 30W/M, 3000K |
| HEX-LOW        | 5007             | 72.5  |             |                                                    | 10W/M, 4000K |
| HEX-STD        | 9741             | 144   |             |                                                    | 20W/M, 4000K |
| HEX-HI         | 13534            | 218   |             |                                                    | 30W/M, 4000K |

*Note: Data provided is from a photometric test of 1 meter hex fixture output with 90CRI at 4000K using a non-dimmable driver.*



*More information and data,  
please visit:  
[www.zalite.cn](http://www.zalite.cn)*

V1.0\_2022-06