

LIGHTPLANE 1H - LPL1H

Indirect / Direct

Suspended

Wall

Surface (direct only)

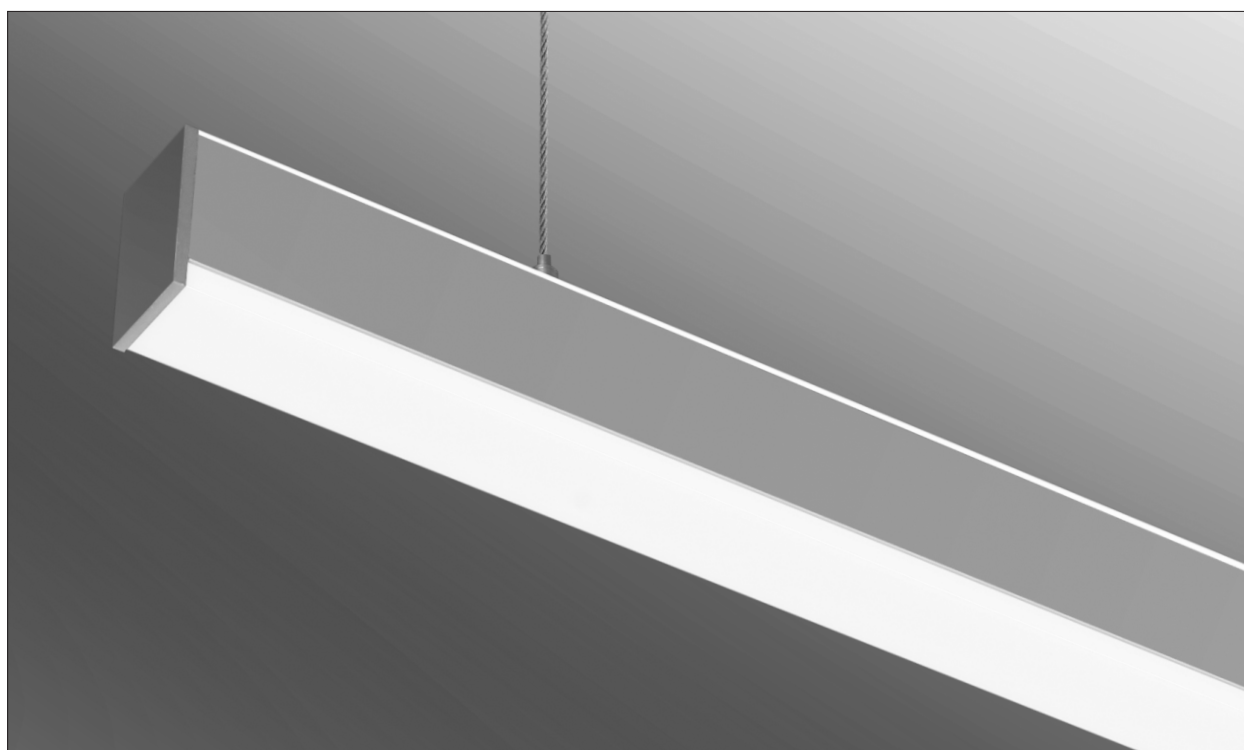


LIGHTPLANE 1H — LPL1H

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)


ZALITE

Dimensions


FLAT/FLAT LENS

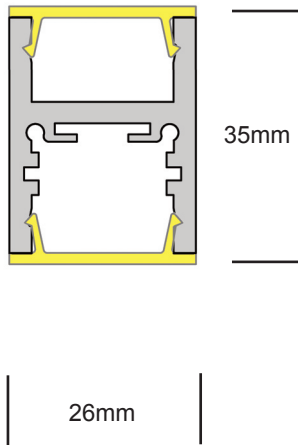

FLAT/DROP LENS

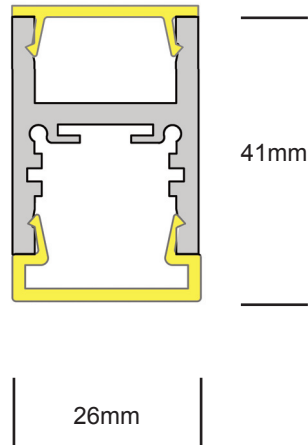


DROP/DROP LENS

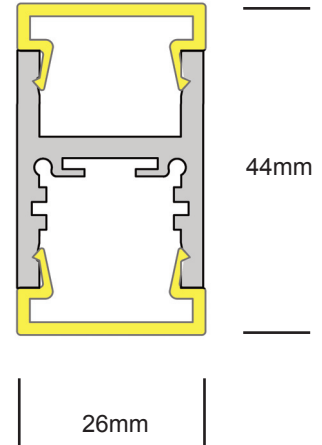


Distribution

DOWNLIGHT ONLY

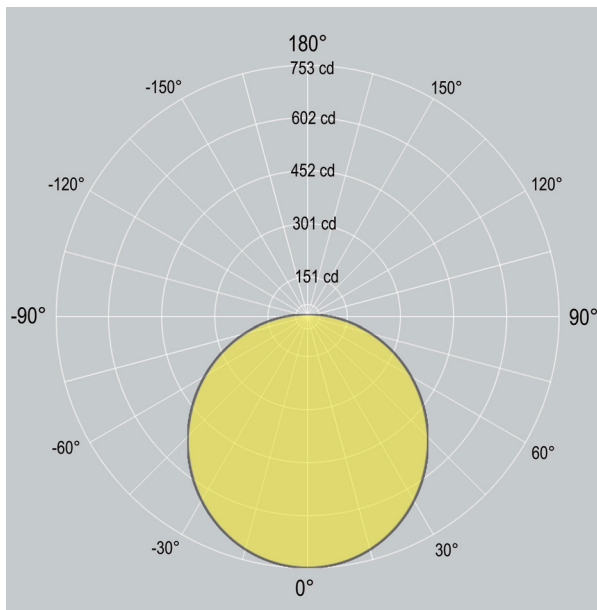

UP AND DOWN

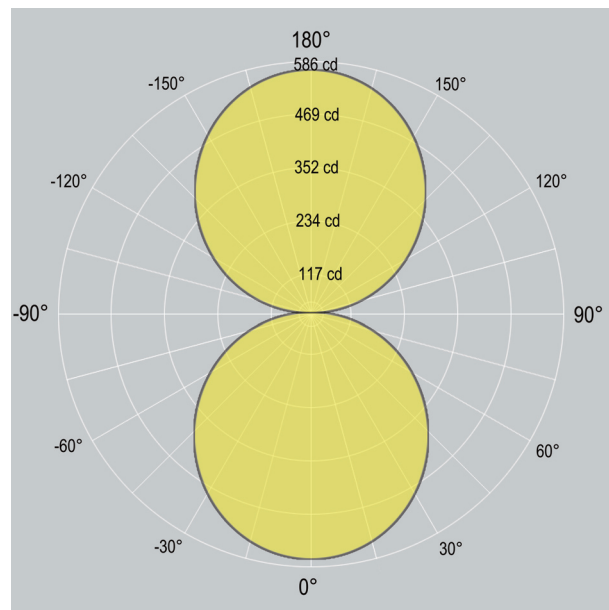

LIGHTPLANE 1H — LPL1H




Suspended, Wall, (Indirect / Direct) - Surface (Direct only)


1. Base Model

LPL1H-SID	Suspended - Indirect/Direct
LPL1H-WMID	Wall Mounted - Indirect/Direct
LPL1H-SM	Surface Mounted (Direct only - snap clip - see below)


LPL1H-SID
Suspended Indirect/Direct



LPL1H-WMID
Wall Mount Indirect/Direct



LPL1H-SM
Surface Mount Direct



2. Run Length

Enter total linear length, (example: 6M)

3. LED Lamping (indirect and direct) - specify "NO-UP" for no uplight (data quoted for Flat Lens)

STD - **xxxxK** (example: STD-4000K) Standard Output, LED 2x20W/M 3350 delivered lm, 71 lm/W @ 4000K

HI - **xxxxK** (example: HI-4000K) High Output, LED 2x30W/M 4700 delivered lm, 67 lm/W @ 4000K

CCT: 3000K 3500K 4000K Option: 2700K 5000K 5700K 6500K

CV - **xxxxK** Additional LED Options
Constant Voltage (for custom lengths) 24/12VDC
Contact factory for detail

TW Tunable White (2700K - 6500K)
Contact factory for detail

RGBW RGB+WHITE - 24/12VDC
Contact factory for detail

LIGHTPLANE 1H — LPL1H

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)

ZALITE

5. LED Driver (remote only)

0/1-10V	0/1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

6. Lens

CV / FLAT	Aluminum Cover on top / FLAT Lens for downlight
CV / DROP	Aluminum Cover on top / DROP Lens for downlight
FLAT / FLAT	FLAT lens for uplight / FLAT lens for downlight
FLAT / DROP	FLAT lens for uplight / DROP lens for downlight
DROP / DROP	DROP lens for uplight / DROP lens for downlight



Choose CV / FLAT or CV / DROP with LPL1HSM (surface mounted).

7. Finish

AL	Standard, natural aluminum
BK	Black powdercoat
WH	White powdercoat
Custom	Custom Color

8. Additional options

EM	1.5 hour Emergency Kit
MS	Motion sensor
Others	Contact factory

LIGHTPLANE 1H — LPL1H

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)

ZALITE

Housing

100% recyclable, extruded architectural grade T6063 aluminum

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup.
Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.


Finish

Standard finish is "Ultimate" aluminum - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.

White, Black, Custom powdercoat options also available.




Suspension & Power



Mitered Corners



WH - WHITE



AL - ALUMINUM



BK - BLACK



Custom / ____

Default canopy finish
is to match fitting color,
unless otherwise
specified



ISO 9001:2015